


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04L 12/58		A2	(11) International Publication Number: WO 99/03238
			(43) International Publication Date: 21 January 1999 (21.01.99)
(21) International Application Number: PCT/FI98/00574 (22) International Filing Date: 6 July 1998 (06.07.98) (30) Priority Data: 972911 9 July 1997 (09.07.97) FI (71) Applicant (for all designated States except US): TELEFON-AKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventors; and (75) Inventors/Applicants (for US only): MELEN, Björn [FI/FI]; Savitiilentie 12, FIN-02320 Espoo (FI). HYVÖNEN, Mika [FI/FI]; Sotilaspoijantie 4, FIN-00390 Helsinki (FI). (74) Agent: BORENIUS & CO. OY AB; Kansakoulukuja 3, FIN-00100 Helsinki (FI).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>Without international search report and to be republished upon receipt of that report.</i>	

(54) Title: ELECTRONIC MAIL

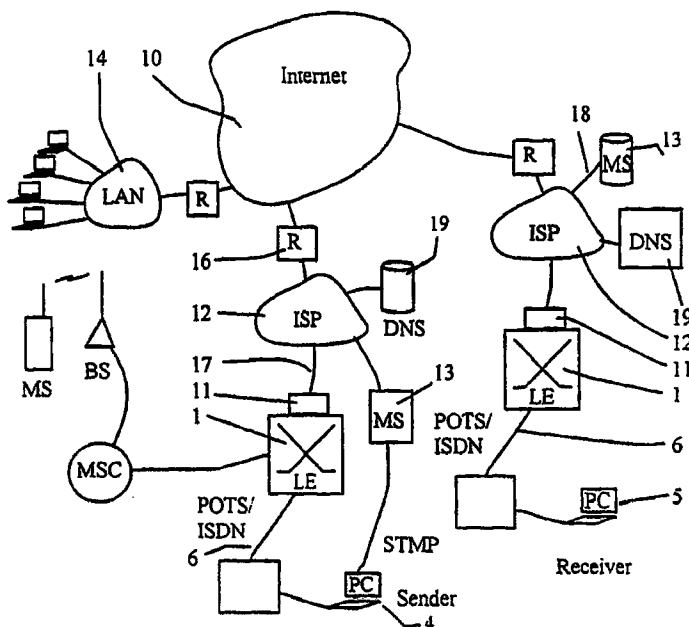

(57) Abstract

The present invention relates to a method, a system and a mail server for sending of an electronic mail. Said method comprises the steps of contacting a service provider (12) of the electronic mail services and subsequently starting a client program in order to communicate with the mail service (13). The user (4) drafts a message, determines a destination of the message and sends the message to the destination. The message is received at the mail service server, which forms necessary fields into the message, asks an A-number information corresponding the IP address from an exchange (1), provides the A-number information with the mail server information and forwards the message to the destination.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Electronic Mail

Field of the invention

5 The present invention relates to electronic mail, and more particularly to an electronic mail system and method adapted to operate in an interlinked relationship with a telephone system and further to an electronic mail server.

10

Background of the invention

Letters, telephones, radio connections, telexes and facsimile machines have been used as primary means for communicating and exchanging information between persons at distant locations. Nowadays, however, with increasing processing capabilities and decreasing prices of computers, a computer networking has been developing rapidly, and an use of electronic mail (e-mail) kind of computer based service has gained increasing popularity. The Electronic Mail (email) is a system whereby a computer user can exchange messages with other computer users (or groups of users) via a communications network. The Electronic mail is one of the most popular uses of the Internet. Individual users communicate by using application programs, such as electronic mail, Telnet and FTP. The Electronic mail has also found widespread use in offices and homes and also therebetween, as it has an access to the services provided by the communications network, via e.g. telephone network and Internet. The E-mail has the advantage that messages can be sent like letters but in an electronic form at any convenient time. The receiver can then view the message in any appropriate time.

35

Information transmitted by the email is visually
recognisable information like a letter. The e-mail is
mainly provided by two main parts, i.e. Header and Body
fields. A part of the information received in the mail
5 message header part depends on the service provider
and/or the operator and/or the used programs. The user
can configure a certain part of the information the
user/service provider/operator wants to send within the
message header and what will be shown to the receiver.

10

Summary of the invention

The information in the header field contains the
originating server name but not the sender information
15 of the host name, i.e. the name of the computer. It does
not say anything to the receiver as he/she is not
familiar with the host names as such. They are usually
received by the mail system. E.g. in case of dynamic
address allocation the sender can get an artificial host
20 name depending on the IP address the user gets.
Especially this has been recently enhanced as the number
of the IP addresses in use is limited. Thus it is
possible for a person to stay unknown or anonymous when
sending the messages or at least there can be hundreds
25 or thousands of users who can use the same IP addresses.
This has been a problem as the messages may contain
information which might only block the mail boxes or can
include "forbidden" or "illegal" information. Also other
reasons exist for the need of obtaining more precise
30 sender information. Therefore it is necessary to know
the sender information better. Also, even in case there
is a more precise information of the sender, it would be
advisable to have some further information e.g. in order
to be able to contact the sender.

35

Therefore, it is an object of the invention to provide a new system and a method for the mail receivers and/or the communications system to identify the sender information of the mail.

5

It is a further object of the invention to provide a system and a method which uses the A-number information in the mail system as identification information received from the number which originated the call.

10

It is another object to form an unique and informative communications system.

The present invention discloses a method and a system to use an electronic mail system as a part of an
15 interactive system which the users can easily reach and in which the contact sender information is shown in a simple manner.

According to a first aspect of the present invention
20 there is provided a system for communicating between computer terminals by means of electronic mail, the system comprising:

a plurality of terminals coupled together through at least one data communications network; and

25

a plurality of electronic mail servers located in the data communications network and arranged to route electronic mail messages between said terminals, each mail server being arranged to append to a received electronic mail message an identifier identifying a
30 server from which the message was last transmitted,

wherein for a given mail message the first mail server in the transmission route is arranged to append to the message a fixed identifier which uniquely identifies the originating terminal.

35

According to a second aspect of the present invention there is provided a method of communicating between computer terminals by means of electronic mail, the method comprising routing electronic mail messages
5 between two terminals coupled to a data communications network, wherein each mail server appends to a received electronic mail message an identifier identifying the server from which the message was last transmitted, and wherein for a given mail message the first mail server
10 in the transmission route appends to the message a fixed identifier which uniquely identifies the originating terminal.

According to a third aspect of the present invention a
15 system for communication between terminals by means of an electronic mail is provided, wherein the system comprises a plurality of terminals connected through at least one network and at least one electronic mail service providers' server via which the electronic mail
20 is used by the terminals as the messages are delivered between two or more terminals, said messages including at least two parts from which one part contains information of the server(s) the messages visited during the transmission, and means for identifying the sender
25 terminal on basis of information about the telephone number from which the sender terminal initiated the connection.

According to a fourth aspect of the invention there is
30 provided a method of sending of an electronic mail is provided, said method comprising the steps of contacting a service provider of the electronic mail services, starting a client program in order to communicate with the mail service, drafting a message, determining a
35 destination of the message, sending the message to the destination, receiving the mail into a mail service

server, forming necessary fields into the message,
asking an A-number information corresponding the IP
address from an exchange, providing the A-number
information with the mail server information, and
5 forwarding the message to the destination.

According to a fifth aspect of the present invention
there is provided a mail server for delivering an
electronic mail between at least two terminals in a
10 communication system. Said mail server comprises means
for receiving the mail through the communication system
into the mailserver, means for forming necessary fields
into the message, means for asking an A-number
information of the sender of the mail corresponding the
15 IP address of the sender from an exchange of the
communications system, means for providing the A-number
information with the mail server information, and means
for forwarding the message to the destination.

20 The invention provides an easy and reliable manner for
obtaining precise information about the actual sender of
a message. The arrangement is such that the message may
be transmitted through various mail servers, and still
the information about the origin of the message is still
25 available.

The above disclosed and other objects, features and
advantages obtained by the invention will become evident
from the following description of the exemplifying
30 embodiments of the present invention when taken together
with the annexed drawings.

Brief description of the drawings

35 Figure 1 shows an example of a network comprising
electronic mailing system.

Figure 2 shows a flow diagram of the functional steps of the invention.

- 5 Figure 3 shows an example of the header part of the message form which may be displayed to the receiver.

Detailed description of the drawings

- 10 Referring now to the Figure 1, a block diagram of a part of a public switched telephone network (PSTN) is disclosed comprising a plurality of local exchanges 1 and a plurality of transit exchanges (not shown). The local exchanges and the transit exchanges are
15 interconnected with each other by trunklines (not shown). The trunk lines also provide interconnections between the local exchanges 1 and the transit exchanges themselves. Each local exchange 1 is also connected to a plurality of subscribers 4, 5 via subscriber lines 6.
20 Although only two subscribers 4, 5 are shown to be the users of the electronic mail, it will be understood that many more subscriber connections are supported at each local exchange or transit exchange, respectively.
- 25 At least one local exchange 1 and/or transit exchange is connected to the Internet 10 via an Access server 11 having interfaces to work towards the users 4 and to the data communications network 10 for connecting the user 4 to the data communications network, e.g. the Internet
30 10, e.g. through an Internet service Provider 12 connected to the mail server 13 or the like by a data transmission link 18. There are connections 17 (e.g. Ethernet) from the LAN (Local Area Network) of ISP (Internet Service Provider) 12 or the connections are
35 through a fixed connection from LAN network 15 of the company to the Domain Name Server 19 (DNS). A domain is

a hierarchically structured global character string address of a host computer in the mail system.

The desired destination of the user 4, 5 is reached
5 through the Internet service provider 12 which can be connected through the telephone exchange 1 and is having an access to the Internet 10. Although only one exemplifying LAN arrangement 14 having multiple users (not shown) and two users 4, 5 connected through the
10 Internet service provider 12 and through provider's LAN arrangement for accessing the Internet 10 are shown, it will be understood that many more users could be supported by the exchanges 1 and the Internet service providers 12 which are connected further by the routers
15 16 to the Internet 10.

The subscribers 4, 5 have each a terminal for communication. It will be recognised that the operations are basically the same for communication between three
20 or more users. The Mailbox is included in the mail server 13. The Mailbox normally consists of the host and user specifications. The standard mailbox naming convention is defined to be "user@domain". Additionally, the Mailbox can be "container" in which the mail is
25 stored, usually only temporarily. The electronic mail server 13 comprises a central processing unit (CPU) for processing the tasks of the mail system, a terminal interface and a storage.

30 In the FIG. 1 the personal computer 4 is logged in to the electronic mail server 13 via the network arrangement 14. FIG. 2 is a basic flowchart illustrating the sequence of operations performed in each terminal 4 for communication with the electronic mail server 13.
35 Usually the service provider 12 is arranged between the exchange 1 and the data network 10, which provides the

connections to e.g. the home user 4 and to which the mail server 13 is connected through the service provider's LAN17.

5 Only two service providers 12 and two mail servers 13 are shown, but it is understood that there might be a number of corresponding providers and servers which can communicate with each other. Each terminal 4 goes through the operations shown in FIG. 2 to display the
10 mail addressed to the terminal etc. The operating procedure is known to the user from the principles thereof. It is evident that many other users, terminals, and telephones can be connected to the system and that also they can use the system and method of the
15 invention.

A diagram in FIG. 3 shows an example of the electronic mail document format which is read by the receiver 5 after the user 4 has sent the message and the receiver
20 has retrieved the message. The electronic mail message of this format is made up of a header and a text, the header of FIG. 3 consisting of a "From" field indicating the originator, a "To" field indicating the addressee, a field indicating the date and clock, "Message ID" field
25 indicating the electronic mail ID (identity), and a "Reference ID" indicating the related electronic mail ID. Other fields are also possible and other fields can be added. Some fields are not visible to the user but only to the mail system. E.g. such a field like
30 "Received:" comprising a local host name and server name, for example "xxxx@lmf.ericsson.fi". Even though it might not be shown to the user, it contains information which cannot be manipulated by the user as it is received from the communications system. Because of this
35 it is valuable when identifying the origin of the mail as the user cannot affect to that field.

The email address is e.g. the domain-based or UUCP address that is used to send electronic mail to a specified destination. UUCP was initially a program run
5 under the UNIX operating system that allowed one UNIX system to send files to another UNIX system via dial-up phone lines. Today, the term UUCP is more commonly used to describe such large international network which uses the UUCP protocol to pass news and electronic mail.

10

In FIG. 3 the Received field: from 76643 white39 (local host) by lmf.ericsson.fi means that "white39" is the host name of the terminal 4, which the system has changed in the inverse table of the DNS from the IP
15 address to the corresponding host name. The number "76643" is the telephone number retrieved from the telephone exchange in that specific call connection. It is dynamically changed in the inverse table.

"lmf.ericsson.fi" describes the name of the mail server
20 13. Next Received field contains information: from lmf.ericsson.fi by lme.ericsson.se. This information is added by the mail server 13 of the receiver 5. When the receiver reads his/her messages a further field can be added as Received: from lme.ericsson.se by POP, which
25 means the server name and the protocol name post office protocol (POP) which is used for reading the mail messages from the mail server 13.

An example for an model for the inverse table of the DNS of one Internet service provider is shown in the
30 following table:

Table

	IP address	Host name	Telephone number
	121.160.32.1	white1	93217
	121.160.32.2	white2	93345
5	121.160.32.3	white3	93171
	.		
	.		
	.		
	121.160.32.39	white39	76643
10	.		
	.		

The table contains the information about the IP addresses in use by the service provider and the corresponding host names. The telephone number can be added as one alternative in the table. Instead of changing the host name, the telephone number (A-number) is taken into the field or with the host name as in FIG. 3 (76643).

Domain Name System (DNS) is a general purpose distributed, replicated, data query service. The principal use thereof is the lookup of host IP addresses based on host names and vice versa in order to send the mail to the right destination. The style of host names presently used in the Internet is called "domain name", because they are the style of names used to look up anything in the DNS. Some important domains are: .COM (commercial), .EDU (educational), .NET (network operations), .GOV (U.S. government), and .MIL (U.S. military). Most countries do also have a domain of their own. For example, .US (United States), .UK (United Kingdom), .AU (Australia).

A mail server is a software program that distributes files or information in response to requests sent via

the email. Internet related examples include Almanac and netlib. The mailserver sends the received mails according to certain time slots but also immediately when it has received the command. As an example, Simple

5 Mail Transfer Protocol (SMTP) is a protocol commonly used to transfer the electronic mail between computers. It is a server-to-server protocol, so other protocols are used to access the messages, e.g. such as the post office protocol (POP). The referred SMTP is closely

10 described in the IETF standard RFC 821. The SMTP design is based on the model of the communication: as the result of a user mail request, the sender-SMTP establishes a two-way transmission channel to the receiver-SMTP. The receiver-SMTP may be either the

15 ultimate destination or an intermediate. SMTP commands are generated by the sender-SMTP and sent to the receiver-SMTP. SMTP replies are sent from the receiver-SMTP to the sender-SMTP in response to the commands. In the receiver-SMTP process the mail is transferred in co-

20 operation with a sender-SMTP process. It waits for a connection to be established via the transport service. It receives the SMTP commands from the sender-SMTP, sends replies, and performs the specified operations. In a sender-SMTP process the mail is transferred in co-

25 operation with a receiver-SMTP process. A local language may be used in the user interface command/reply dialogue. The sender-SMTP initiates the transport service connection. It initiates the SMTP commands, receives, replies, and governs the transfer of the mail.

30 The transmission channel can be a full-duplex communication path between a sender-SMTP and a receiver-SMTP for the exchange of commands, replies and mail text.

35 Referring to FIG. 2, when the user e.g. from home wants to use mail services he/she has (step 21) to establish a

connection to the service provider by calling to the service provider's number, whereafter Point-to-Point Protocol is used for setting up the connection. In step 22 he/she starts the client program which usually is
5 already in his own computer. He/she starts the program, and in step 23 writes the message, gives the destination address ("fills in" name and domain name) in step 24 and clicks the send-button in step 25.

As already explained, the message comprises two parts,
10 the header part and body part. The header consists of all of the text lines from the first line until a blank line, as illustrated in the example of FIG. 3. The body is everything following the first blank line up to the end of the file comprising the "real" message the user
15 wants to send. The first blank line is a part of neither. The header contains the information of the e-mail address of the sender, which e-mail address is composed of two parts, namely the user account and the mail server name, i.e. the ultimate destination host as
20 well as the destination mailbox name, e.g. john.melen@ericsson.AU. The email address of the receiver consists of user account or an alias name and mail server address and message-ID and one or more optional fields.

25 It is possible that there are many servers between the sender and receiver. It is possible to find from the Header part a so called Received field e.g. from xxxxxx by vvvvvvvv including every hop the mail system does from
30 every visited server. The user cannot influence this information, but it is added by every server used in the transmission. Earlier when the fixed addresses were used this information told what was the computer from which the message was sent. Nowadays, when dynamic address
35 allocation is used more and more for this kind of connection, it is impossible afterwards or at least very

difficult to trace who really used the certain address at the time the message was sent.

The used program establishes a SMTP connection to the
5 mail server, step 26. Usually the user needs to call to
the Internet service provider with whom he has the
agreement and which manages the addresses of email
addresses in his mail server or servers (The ISP can
have many mail servers which are arranged e.g. in a
10 hierarchical order. Thus, as the user is sending
something, the message will go through many mail servers
and also through mail servers of other ISPs.)

The mail server generates then so called "received" -
field which includes the name of the client behind which
15 the working station is and the mail server name, step
27. However, this information might not be extremely
valuable, as the message sender may be who one else
accessed to the mail server from e.g. the telephone
exchange or the service provider client, especially when
20 the dynamic allocation is concerned. The origin of the
sender might be known only from the field "user name"
which is configurable by the user.

However, the call connection makes it possible to use
25 the calling number (A-number) information as an
identification of the mail sender so that the
information of the IP address and telephone number are
updated when the call is connected, either by means of
the telephone exchange or a computer program asking for
30 the number. The mail server may ask for the number from
the telephone exchange. The IP address and said
telephone number are dynamically combined. Thus the
actual telephone number is known by the telephone
exchange in step 28. It is also useful to have a fixed
35 IP address. Then the user has always the same IP address
which always corresponds the same telephone number. The

allocation information is sent to the mail server as a request having now the information of the telephone number which informs from which telephone address the message has been sent. The telephone number of the sender (host) can be added to the received -field, or it can be saved in the mail server for proper use so that the IP (Internet Protocol) address and the respective telephone number is identified, step 29. In one alternative the telephone number can also replace the host name. Finally, the message is sent to the final destination, step 30.

This system is very useful as the IP addresses are changed dynamically and the IP address cannot specify the user, and thus, when combining the above data, the inventive system can recognise the user in a similarly safe way as in the telephone network. The A-number 76643 of the user 4 is put e.g. in the place of "white39" in the mail information. When call connection is concerned and the user is identified by the fixed or dynamically allocated IP address, the host name information is changed or connected or replaced by the A subscriber identification. The A subscriber information, i.e. the user 4 is the phone number from which the connection has occurred and from which the E-mail is then sent. This function thus makes it possible to trace the E-mail sender independently on the fields the user could manipulate or change.

It will further be understood that the connection to the network can be taken also from a mobile terminal MS connected to the computer via air interface and using a base station BS and mobile switching centres MSCs, as is shown in figure 1. The respective transmission links are arranged between those devices. There is also a transmission link connection between the afore mentioned

mobile switching centre and the exchanges 1. Thus the invention is not limited only to the fixed network services.

- 5 The telephone number may also be placed in the host name field.

- It will be appreciated by persons of skill in the art that various modifications may be made to the above
10 described embodiments without departing from the scope of the present invention. For example, rather than identifying the originating terminal using the terminal's A-number, some other fixed identifier may be used (by "fixed" is meant here that the user does not
15 have the possibility to change the identifier). For example, instead of the A-number, a user log-on username may be included in the mail message header part.

Claims

1. A system for communicating between computer terminals by means of electronic mail, the system
5 comprising:
a plurality of terminals coupled together through at least one data communications network; and
a plurality of electronic mail servers located in the data communications network and arranged to route
10 electronic mail messages between said terminals, each mail server being arranged to append to a received electronic mail message an identifier identifying a server from which the message was last transmitted,
wherein for a given mail message the first mail
15 server in the transmission route is arranged to append to the message a fixed identifier which uniquely identifies the originating terminal.
2. A system according to claim 1 and comprising
20 transmission means for transmitting said fixed identifier to said first mail server from either the originating terminal or from a communication node connecting the originating terminal to said first mail server, the transmission of the fixed identifier being
25 separate from the transmission of the mail message.
3. A system according to claim 2 and comprising a telephone network arranged to couple the originating terminal to said data communications network, said
30 communication node being an exchange of the telephone network and said fixed identifier being the connection point (A-number) of the originating terminal to the telephone network.
- 35 4. A system according to claim 2, wherein said fixed identifier is a username allocated to the originating

terminal and entered by a user as part of a log-on stage.

5 5. A method of communicating between computer
terminals by means of electronic mail, the method
comprising routing electronic mail messages between two
terminals coupled to a data communications network,
wherein each mail server appends to a received
electronic mail message an identifier identifying the
10 server from which the message was last transmitted, and
wherein for a given mail message the first mail server
in the transmission route appends to the message a fixed
identifier which uniquely identifies the originating
terminal.

15 6. A system for communication between terminals by means
of an electronic mail, wherein the system comprises a
plurality of terminals connected through at least one
network and at least one electronic mail server of a
20 service provider via which the electronic mail is used
by the terminals as the messages are delivered between
two or more terminals, said messages including at least
two parts from which one part contains information of
the server(s) the messages visited during the
25 transmission, and means for identifying the sender
terminal on basis of information about the telephone
number from which the sender terminal initiated the
connection.

30 7. A system as claimed in claim 6, wherein the sender
terminal information is the telephone number an exchange
of the used network has an inlet for a subscriber line.

35 8. A system as claimed in claim 6, wherein the
electronic mail connection is made by a call connection
through an exchange of the telephone network, the

information of the IP address and the telephone number are updated as the call is connected either by means of a telephone exchange or a computer program asking for the number, the telephone number of the caller

5 corresponding the IP address is sent to said mail server as a request, whereafter said mail server is provided with the information of the telephone number which informs from which subscriber line the message was sent.

10 9. A method for sending of an electronic mail, said method comprising the steps of: contacting a service provider of the electronic mail services, starting a client program in order to communicate with the mail service, drafting a message, determining a destination
15 of the message, sending the message to the destination, receiving the mail into a mail service server, forming necessary fields into the message, asking an A-number information corresponding the IP address from an exchange, providing the A-number information with the
20 mail server information, and forwarding the message to the destination.

10. A method as claimed in claim 9, wherein said method further comprises a step of combining the IP
25 address and the telephone number information during the call connection.

11. A method as claimed in claim 9, wherein said method further comprises a step of locating a sender
30 host by means of the telephone number information.


12. A method as claimed in claim 9, wherein said method further comprises a step of replacing a sender host name with the telephone number of the sender.

13. A method as claimed in claim 9, wherein said method further comprises a step of providing the header part of the message with the telephone number received from the exchange.

5

14. A method as claimed in claim 9, wherein the A-number is in a host name field.

15. A mail server for delivering an electronic mail
10 between at least two terminals in a communication system, said mail server comprising means for receiving the mail through the communication system into the mail server, means for forming necessary fields into the message, means for asking an A-number information of the
15 sender of the mail corresponding the IP address of the sender from an exchange of the communications system, means for providing the A-number information with the mail server information, and means for forwarding the message to the destination.

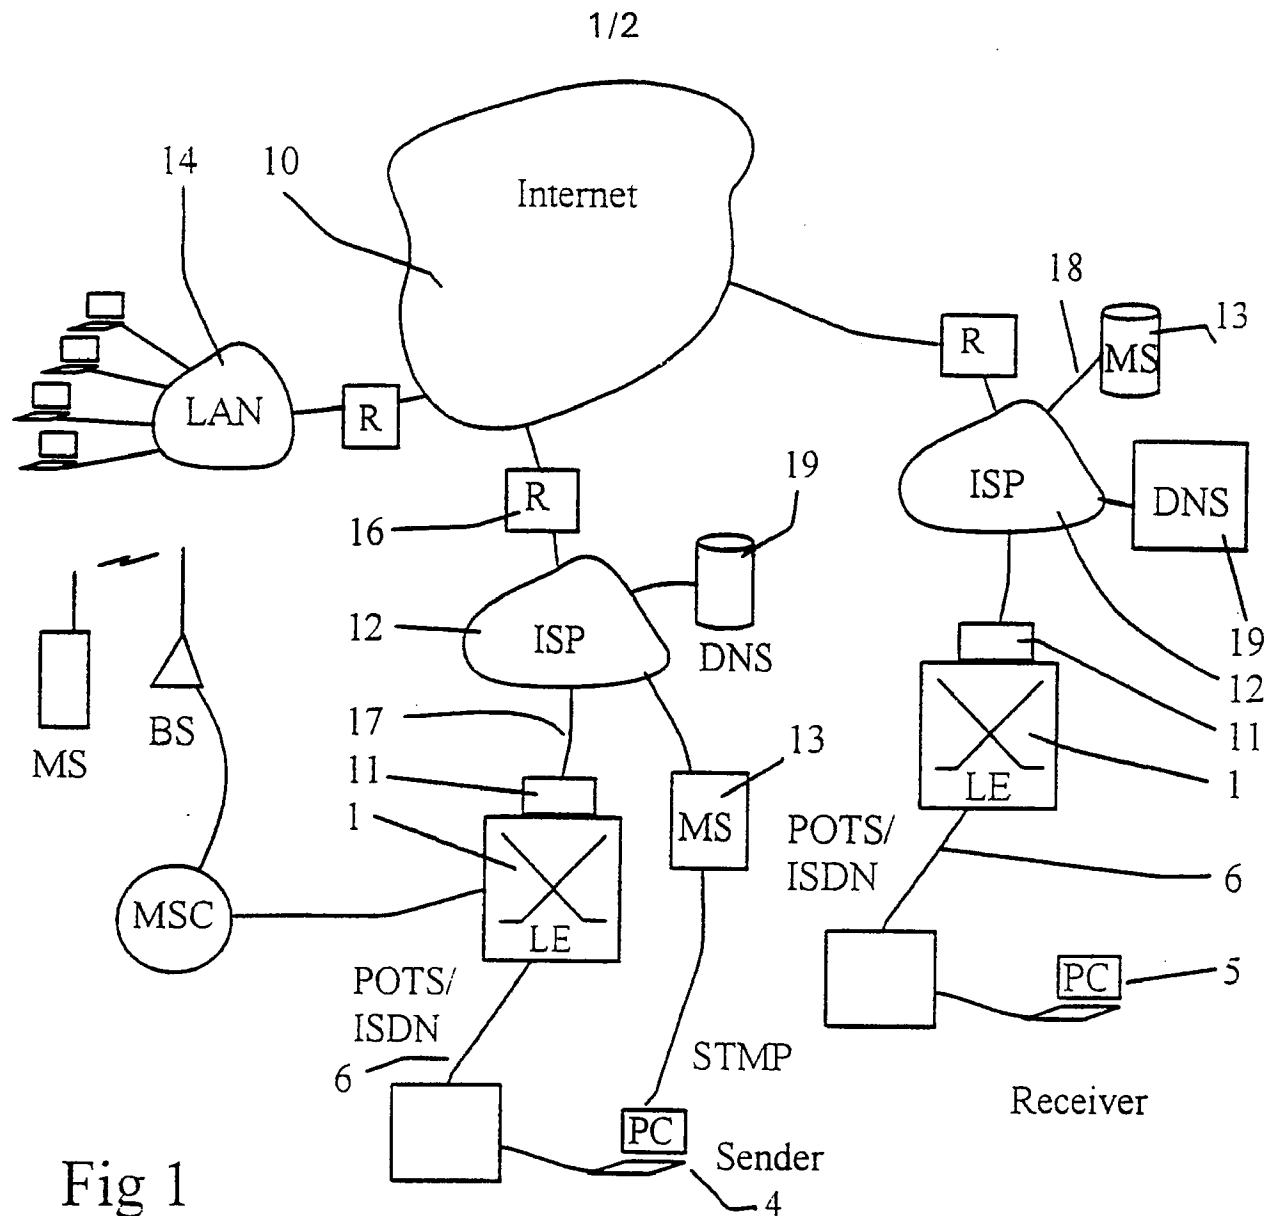

Received: from lme.ericsson.se by POP

Received: from lmf.ericsson.fi by lme.ericsson.se

Received: from 76643 white39 (local host) by lmf.ericsson.fi

Reference: idBB11177; thu, 8 May 1997 10:26:39 +0300

Sender: xxx @lmf.ericsson.fi

MessageID: 23232.88 @lmf.ericsson.fi

Fig 3

FROM: xxxx @lmf.ericsson.fi

TO: xxxxx @lmf.ericsson.se

2/2


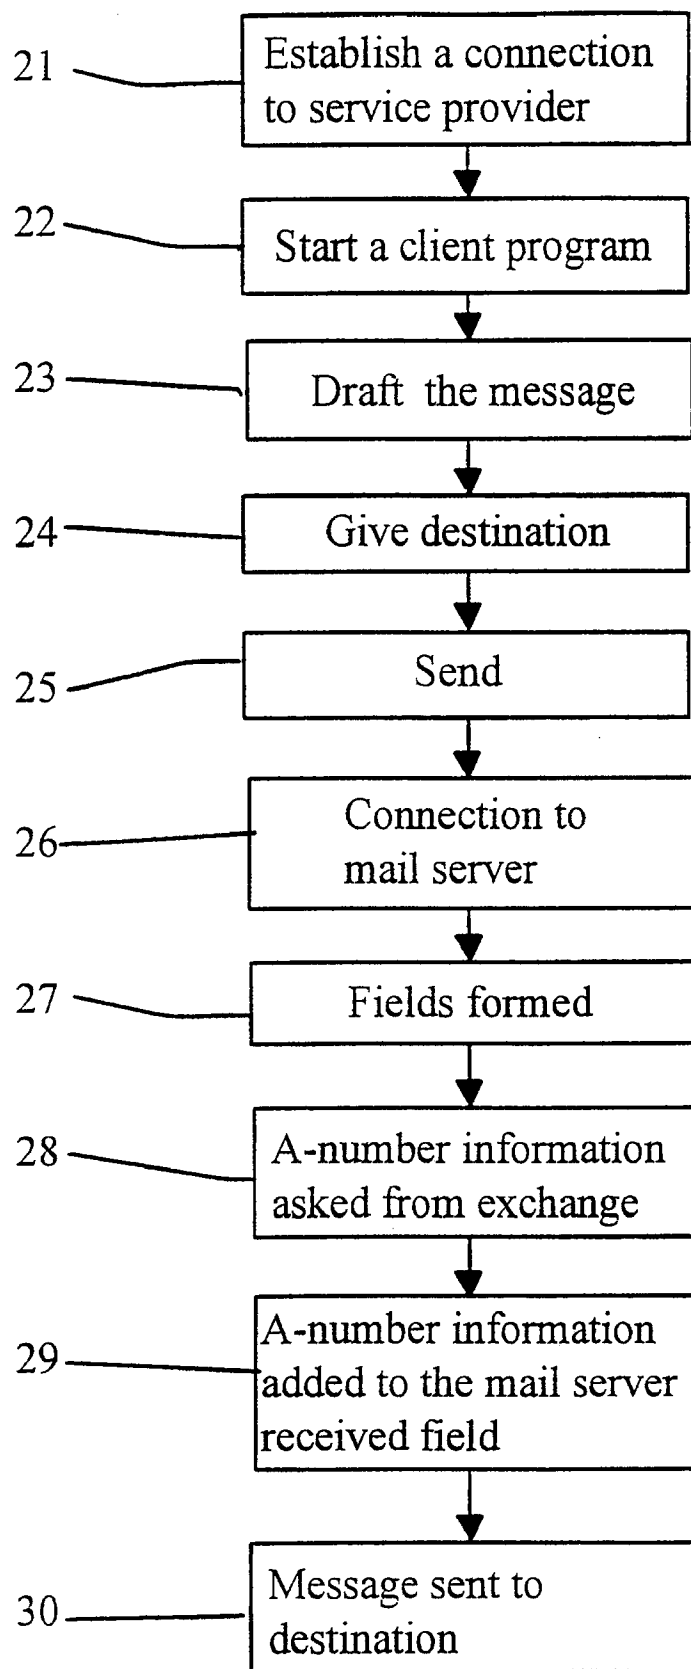


Fig 2

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04L 12/58		A3	(11) International Publication Number: WO 99/03238
			(43) International Publication Date: 21 January 1999 (21.01.99)
(21) International Application Number: PCT/FI98/00574		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 6 July 1998 (06.07.98)			
(30) Priority Data: 972911 9 July 1997 (09.07.97) FI			
(71) Applicant (for all designated States except US): TELEFON-AKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).			
(72) Inventors; and (75) Inventors/Applicants (for US only): MELEN, Björn [FI/FI]; Savitiilentie 12, FIN-02320 Espoo (FI). HYVÖNEN, Mika [FI/FI]; Sotilaspojantie 4, FIN-00390 Helsinki (FI).		Published With international search report.	
(74) Agent: BORENIUS & CO. OY AB; Kansakoulukuja 3, FIN-00100 Helsinki (FI).		(88) Date of publication of the international search report: 8 April 1999 (08.04.99)	

(54) Title: MAIL SERVER BEING ARRANGED TO APPEND AN IDENTIFIER TO A RECEIVED MAIL

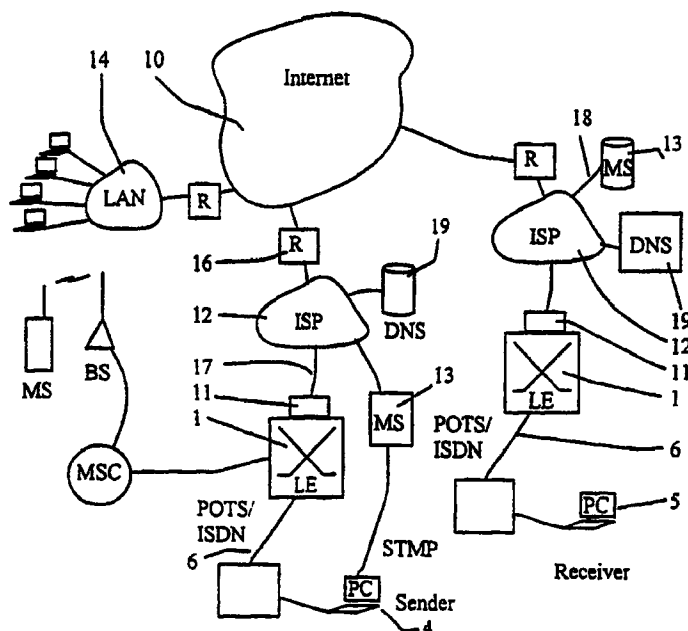

(57) Abstract

The present invention relates to a method, a system and a mail server for sending of an electronic mail. Said method comprises the steps of contacting a service provider (12) of the electronic mail services and subsequently starting a client program in order to communicate with the mail service (13). The user (4) drafts a message, determines a destination of the message and sends the message to the destination. The message is received at the mail service server, which forms necessary fields into the message, asks an A-number information corresponding the IP address from an exchange (1), provides the A-number information with the mail server information and forwards the message to the destination.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 98/00574

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04L 12/58

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04L, H04M, H04Q, G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPIL, EDOC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5493564 A (JOHN A. MULLAN), 20 February 1996 (20.02.96), column 8, line 13 - column 11, line 66, claims 1-22 --	1-15
A	US 5590178 A (MASAHIKO MURAKAMI ET AL), 31 December 1996 (31.12.96), column 2, line 17 - column 3, line 42, claim 1 --	1-15
A	US 5483352 A (NORIYUKI FUKUYAMA ET AL), 9 January 1996 (09.01.96), column 2, line 50 - column 4, line 50; column 8, line 41 - column 10, line 26, claims 1-16 --	1-15

☒ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

28 January 1999

Date of mailing of the international search report

01-02-1999

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Erik Johannesson

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 98/00574

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0606720 A2 (AT & T CORP), 20 July 1994 (20.07.94), column 3, line 47 - column 5, line 28; column 7, line 24 - column 8, line 12 --	1-15
A	US 5537543 A (TUTOMO ITOH ET AL), 16 July 1996 (16.07.96), claims 1-26, abstract --	1-15
P,A	US 5768505 A (FRANK WILLIAM GILCHRIST ET AL), 16 June 1998 (16.06.98), claims 1-92 -- -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

21/12/98

International application No.

PCT/FI 98/00574

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
US	5493564	A	20/02/96	NONE	
US	5590178	A	31/12/96	JP 7099508 A	11/04/95
US	5483352	A	09/01/96	JP 2756392 B	25/05/98
				JP 6077995 A	18/03/94
EP	0606720	A2	20/07/94	CA 2109787 A	01/07/94
				JP 6244942 A	02/09/94
				US 5434914 A	18/07/95
US	5537543	A	16/07/96	US 5557736 A	17/09/96
				JP 5265955 A	15/10/93
				US 5481698 A	02/01/96
				JP 6149693 A	31/05/94
US	5768505	A	16/06/98	CN 1159033 A	10/09/97